

Welcome to IEEE Xplore®

- ☐ Home
- ☐ What Can I Access?
- ☐ Log-out

Tables of Contents

- ☐ Journals & Magazines
- ☐ Conference Proceedings
- ☐ Standards

Search

- ☐ By Author
- ☐ Basic
- ☐ Advanced

Member Services

- ☐ Join IEEE
- ☐ Establish IEEE Web Account
- ☐ Access the IEEE Member Digital Library

IEEE Enterprise

- ☐ Access the IEEE Enterprise File Cabinet

Print Format

Your search matched **4** of **1075719** documents.A maximum of **500** results are displayed, **15** to a page, sorted by **Relevance** in **Descending** order.

Refine This Search:

You may refine your search by editing the current search expression or entering a new one in the text box.

usb <and> rf

Search

☐ Check to search within this result set

Results Key:

JNL = Journal or Magazine **CNF** = Conference **STD** = Standard**1 On-wafer testing of a W-band HEMT image-rejection downconverter MMIC***Lin, E.W.; Lo, D.C.W.; Wang, H.; Huang, T.W.; Beidenbender, M.; Dow, G.S.; Allen, B.;*Microwave Symposium Digest, 1995., IEEE MTT-S International , 16-20 May 1995
Pages:1479 - 1482 vol.3[\[Abstract\]](#) [\[PDF Full-Text \(327 KB\)\]](#) IEEE CNF**2 A cable-modem RF tuner***Stadius, K.; Malinen, A.; Jarvio, P.; Halonen, K.; Paatsila, P.;*

European Solid-State Circuits, 2003. ESSCIRC '03. Conference on , 16-18 Sept. 2003

Pages:421 - 424

[\[Abstract\]](#) [\[PDF Full-Text \(646 KB\)\]](#) IEEE CNF**3 Design of a multiband OFDM system for realistic UWB channel environments***Batra, A.; Balakrishnan, J.; Aiello, G.R.; Foerster, J.R.; Dabak, A.;*

Microwave Theory and Techniques, IEEE Transactions on , Volume: 52 , Issue: 9 , Sept. 2004

Pages:2123 - 2138

[\[Abstract\]](#) [\[PDF Full-Text \(840 KB\)\]](#) IEEE JNL**4 The Earth is mobile-power***Efland, T.R.;*

Power Semiconductor Devices and ICs, 2003. Proceedings. ISPSD '03. 2003 IEEE 15th International Symposium on , 14-17 April 2003

Pages:2 - 9

[\[Abstract\]](#) [\[PDF Full-Text \(934 KB\)\]](#) IEEE CNF

Welcome to IEEE Xplore®

- ☐ Home
- ☐ What Can I Access?
- ☐ Log-out

Tables of Contents

- ☐ Journals & Magazines
- ☐ Conference Proceedings
- ☐ Standards

Search

- ☐ By Author
- ☐ Basic
- ☐ Advanced

Member Services

- ☐ Join IEEE
- ☐ Establish IEEE Web Account
- ☐ Access the IEEE Member Digital Library

IEEE Enterprise

- ☐ Access the IEEE Enterprise File Cabinet

Your search matched **2** of **1075719** documents.

A maximum of **500** results are displayed, **15** to a page, sorted by **Relevance** in **Descending** order.

Refine This Search:

You may refine your search by editing the current search expression or entering a new one in the text box.

☐ Check to search within this result set

Results Key:

JNL = Journal or Magazine **CNF** = Conference **STD** = Standard

1 Frame synchronization in UWB using multiple sync words to eliminate line frequencies

Mo, S.S.; Gelman, A.D.; Gopal, J.;

Wireless Communications and Networking, 2003. WCNC 2003. 2003

IEEE , Volume: 2 , 16-20 March 2003

Pages:773 - 778 vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(349 KB\)\]](#) IEEE CNF

2 Design of a multiband OFDM system for realistic UWB channel environments

Batra, A.; Balakrishnan, J.; Aiello, G.R.; Foerster, J.R.; Dabak, A.;

Microwave Theory and Techniques, IEEE Transactions on , Volume: 52 , Issue:

9 , Sept. 2004

Pages:2123 - 2138

[\[Abstract\]](#) [\[PDF Full-Text \(840 KB\)\]](#) IEEE JNL

 Print Format

Welcome to IEEE Xplore®

- ☐ Home
- ☐ What Can I Access?
- ☐ Log-out

Tables of Contents

- ☐ Journals & Magazines
- ☐ Conference Proceedings
- ☐ Standards

Search

- ☐ By Author
- ☐ Basic
- ☐ Advanced

Member Services

- ☐ Join IEEE
- ☐ Establish IEEE Web Account
- ☐ Access the IEEE Member Digital Library

IEEE Enterprise

- ☐ Access the IEEE Enterprise File Cabinet

Your search matched **15** of **1075719** documents.

A maximum of **500** results are displayed, **15** to a page, sorted by **Relevance** in **Descending** order.

Refine This Search:

You may refine your search by editing the current search expression or entering a new one in the text box.

☐ Check to search within this result set

Results Key:

JNL = Journal or Magazine **CNF** = Conference **STD** = Standard

1 Frame synchronization in UWB using multiple sync words to eliminate line frequencies

Mo, S.S.; Gelman, A.D.; Gopal, J.;

Wireless Communications and Networking, 2003. WCNC 2003. 2003

IEEE, Volume: 2, 16-20 March 2003

Pages:773 - 778 vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(349 KB\)\]](#) IEEE CNF

2 Wireless infrared communications with edge position modulation for mobile devices

Luftner, T.; Kropl, C.; Hagelauer, R.; Huemer, M.; Weigel, R.; Hausner, J.;

Wireless Communications, IEEE [see also IEEE Personal

Communications], Volume: 10, Issue: 2, April 2003

Pages:15 - 21

[\[Abstract\]](#) [\[PDF Full-Text \(569 KB\)\]](#) IEEE JNL

3 Defying hard times [semiconductor intellectual property business]

Dettmer, R.;

IEE Review, Volume: 49, Issue: 3, March 2003

Pages:32 - 34

[\[Abstract\]](#) [\[PDF Full-Text \(432 KB\)\]](#) IEEE JNL

4 Instrument connectivity through mixed I/O test systems

Cheij, D.;

AUTOTESTCON 2003. IEEE Systems Readiness Technology Conference.

Proceedings, 22-25 Sept. 2003

Pages:502 - 504

[\[Abstract\]](#) [\[PDF Full-Text \(288 KB\)\]](#) IEEE CNF

5 A novel synthesis technique for communication controller hardware from declarative data communication protocol specifications

Siegmund, R.; Muller, D.;

Design Automation Conference, 2002. Proceedings. 39th, 10-14 June 2002

[\[Abstract\]](#) [\[PDF Full-Text \(721 KB\)\]](#) IEEE CNF

6 A novel architecture of Home gateway for efficient packet process

Kyoung-Youn Cho; Kwang-ho Choi;

Knowledge Media Networking, 2002. Proceedings. IEEE Workshop on , 10-12 July 2002

Pages:63 - 67

[\[Abstract\]](#) [\[PDF Full-Text \(295 KB\)\]](#) IEEE CNF

7 Area-efficient digital baseband module for Bluetooth wireless communications

Myoung-Cheol Shin; Seong-Il Park; Sung-Won Lee; Se-Hyeon Kang; In-Cheol Park;

Circuits and Systems, 2002. ISCAS 2002. IEEE International Symposium on , Volume: 5 , 26-29 May 2002

Pages:V-729 - V-732 vol.5

[\[Abstract\]](#) [\[PDF Full-Text \(513 KB\)\]](#) IEEE CNF

8 The future of wireless application development for a connected vehicle

Pu, K.;

Northcon/98 Conference Proceedings , 21-23 Oct. 1998

Pages:104 - 106

[\[Abstract\]](#) [\[PDF Full-Text \(228 KB\)\]](#) IEEE CNF

9 An Ethernet based data storage protocol for home network

Wang, W.Y.H.; Tow Chong Chong;

Consumer Electronics, IEEE Transactions on , Volume: 50 , Issue: 2 , May 2004

Pages:543 - 551

[\[Abstract\]](#) [\[PDF Full-Text \(488 KB\)\]](#) IEEE JNL

10 Design of a multiband OFDM system for realistic UWB channel environments

Batra, A.; Balakrishnan, J.; Aiello, G.R.; Foerster, J.R.; Dabak, A.;

Microwave Theory and Techniques, IEEE Transactions on , Volume: 52 , Issue: 9 , Sept. 2004

Pages:2123 - 2138

[\[Abstract\]](#) [\[PDF Full-Text \(840 KB\)\]](#) IEEE JNL

11 Efficient optoelectronic mixing at Ka-band using a mode-locked laser

Daryoush, A.S.; Sato, K.; Horikawa, K.; Ogawa, H.;

Microwave and Guided Wave Letters, IEEE [see also IEEE Microwave and Wireless Components Letters] , Volume: 9 , Issue: 8 , Aug. 1999

Pages:317 - 319

[\[Abstract\]](#) [\[PDF Full-Text \(124 KB\)\]](#) IEEE JNL

12 Wireless communication in automation

Bradac, Z.; Fiedler, P.; Cach, P.; Vrba, R.;

Electronics, Circuits and Systems, 2003. ICECS 2003. Proceedings of the 2003 10th IEEE International Conference on , Volume: 2 , 14-17 Dec. 2003

Pages:659 - 662 Vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(1453 KB\)\]](#) IEEE CNF

13 **H.264 codec system-on-chip design and verification**

Qiang Peng; Jin Jing;

ASIC, 2003. Proceedings. 5th International Conference on , Volume: 2 , 21-24 Oct. 2003

Pages:922 - 925 Vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(371 KB\)\]](#) IEEE CNF

14 **The Earth is mobile-power**

Efland, T.R.;

Power Semiconductor Devices and ICs, 2003. Proceedings. ISPSD '03. 2003 IEEE 15th International Symposium on , 14-17 April 2003

Pages:2 - 9

[\[Abstract\]](#) [\[PDF Full-Text \(934 KB\)\]](#) IEEE CNF

15 **Applying CORBA technology to ad-hoc network services with mobile terminals**

Iga, N.; Murakami, T.; Satoh, N.; Nakamoto, Y.;

Object-Oriented Real-Time Distributed Computing, 2002. (ISORC 2002). Proceedings. Fifth IEEE International Symposium on , 29 April-1 May 2002

Pages:159 - 162

[\[Abstract\]](#) [\[PDF Full-Text \(296 KB\)\]](#) IEEE CNF

Welcome to IEEE Xplore®

- ☐ Home
- ☐ What Can I Access?
- ☐ Log-out

Tables of Contents

- ☐ Journals & Magazines
- ☐ Conference Proceedings
- ☐ Standards

Search

- ☐ By Author
- ☐ Basic
- ☐ Advanced

Member Services

- ☐ Join IEEE
- ☐ Establish IEEE Web Account
- ☐ Access the IEEE Member Digital Library

IEEE Enterprise

- ☐ Access the IEEE Enterprise File Cabinet

Your search matched **10** of **1075719** documents.

A maximum of **500** results are displayed, **15** to a page, sorted by **Relevance** in **Descending** order.

Refine This Search:

You may refine your search by editing the current search expression or entering a new one in the text box.

☐ Check to search within this result set

Results Key:

JNL = Journal or Magazine **CNF** = Conference **STD** = Standard

1 **On the power spectral density of SGLS and USB waveforms**

Wang, C.C.; Nguyen, T.M.; Yoh, J.;

Aerospace Conference, 1999. Proceedings. 1999 IEEE , Volume: 2 , 6-13 March 1999

Pages:137 - 143 vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(500 KB\)\]](#) IEEE CNF

2 **Wireless infrared communications with edge position modulation for mobile devices**

Luftner, T.; Kropl, C.; Hagelauer, R.; Huemer, M.; Weigel, R.; Hausner, J.;

Wireless Communications, IEEE [see also IEEE Personal Communications] , Volume: 10 , Issue: 2 , April 2003

Pages:15 - 21

[\[Abstract\]](#) [\[PDF Full-Text \(569 KB\)\]](#) IEEE JNL

3 **USB on-the-go interface for portable devices**

Remple, T.B.;

Consumer Electronics, 2003. ICCE. 2003 IEEE International Conference on , 17-19 June 2003

Pages:8 - 9

[\[Abstract\]](#) [\[PDF Full-Text \(254 KB\)\]](#) IEEE CNF

4 **Area-efficient digital baseband module for Bluetooth wireless communications**

Myoung-Cheol Shin; Seong-Il Park; Sung-Won Lee; Se-Hyeon Kang; In-Cheol Park;

Circuits and Systems, 2002. ISCAS 2002. IEEE International Symposium on , Volume: 5 , 26-29 May 2002

Pages:V-729 - V-732 vol.5

[\[Abstract\]](#) [\[PDF Full-Text \(513 KB\)\]](#) IEEE CNF

5 **The future of wireless application development for a connected vehicle**

Pu, K.;

Welcome to IEEE Xplore®

- ☐ Home
- ☐ What Can I Access?
- ☐ Log-out

Tables of Contents

- ☐ Journals & Magazines
- ☐ Conference Proceedings
- ☐ Standards

Search

- ☐ By Author
- ☐ Basic
- ☐ Advanced

Member Services

- ☐ Join IEEE
- ☐ Establish IEEE Web Account
- ☐ Access the IEEE Member Digital Library

IEEE Enterprise

- ☐ Access the IEEE Enterprise File Cabinet

Print Format

Your search matched **13** of **1075719** documents.A maximum of **500** results are displayed, **15** to a page, sorted by **Relevance** in **Descending** order.

Refine This Search:

You may refine your search by editing the current search expression or entering a new one in the text box.

usb <and> radio

Search

☐ Check to search within this result set

Results Key:

JNL = Journal or Magazine **CNF** = Conference **STD** = Standard**1 Frame synchronization in UWB using multiple sync words to eliminate line frequencies***Mo, S.S.; Gelman, A.D.; Gopal, J.;*

Wireless Communications and Networking, 2003. WCNC 2003. 2003

IEEE, Volume: 2, 16-20 March 2003

Pages: 773 - 778 vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(349 KB\)\]](#) IEEE CNF**2 Wireless infrared communications with edge position modulation for mobile devices***Luftner, T.; Kropl, C.; Hagelauer, R.; Huemer, M.; Weigel, R.; Hausner, J.;*

Wireless Communications, IEEE [see also IEEE Personal Communications], Volume: 10, Issue: 2, April 2003

Pages: 15 - 21

[\[Abstract\]](#) [\[PDF Full-Text \(569 KB\)\]](#) IEEE JNL**3 Design and features of an intelligent PC-based DAB receiver***Nathan, D.; Sputh, B.; Faust, O.; Chua Beng Koon;*

Consumer Electronics, IEEE Transactions on, Volume: 48, Issue: 2, May 2002

Pages: 322 - 328

[\[Abstract\]](#) [\[PDF Full-Text \(828 KB\)\]](#) IEEE JNL**4 Real-time decoding and streaming of DAB audio frames by a user-space program running on a non-real-time OS***Nathan, D.; Sputh, B.; Faust, O.; Chua Beng Koon;*

Consumer Electronics, IEEE Transactions on, Volume: 48, Issue: 2, May 2002

Pages: 313 - 321

[\[Abstract\]](#) [\[PDF Full-Text \(820 KB\)\]](#) IEEE JNL**5 FM RDS PnP radio receiver***Glazar, B.; Jankovec, M.; Topic, M.;*

EUROCON 2003. Computer as a Tool. The IEEE Region 8, Volume: 1, 22-24 Sept. 2003

[\[Abstract\]](#) [\[PDF Full-Text \(446 KB\)\]](#) IEEE CNF

6 USB on-the-go interface for portable devices

Remple, T.B.;

Consumer Electronics, 2003. ICCE. 2003 IEEE International Conference on , 17-19 June 2003

Pages:8 - 9

[\[Abstract\]](#) [\[PDF Full-Text \(254 KB\)\]](#) IEEE CNF

7 The MSM5100™ cdma2000 + AMPS + gpsOne™ + Bluetooth multimode ASIC for 3G handsets

Butler, B.K.; King-Chung Lai; Saints, K.; Meagher, B.;

Radio Frequency Integrated Circuits (RFIC) Symposium, 2002 IEEE , 2-4 June 2002

Pages:186_A - 186_F

[\[Abstract\]](#) [\[PDF Full-Text \(489 KB\)\]](#) IEEE CNF

8 Area-efficient digital baseband module for Bluetooth wireless communications

Myoung-Cheol Shin; Seong-Il Park; Sung-Won Lee; Se-Hyeon Kang; In-Cheol Park;

Circuits and Systems, 2002. ISCAS 2002. IEEE International Symposium on , Volume: 5 , 26-29 May 2002

Pages:V-729 - V-732 vol.5

[\[Abstract\]](#) [\[PDF Full-Text \(513 KB\)\]](#) IEEE CNF

9 On the power spectral density of SGLS and USB waveforms

Wang, C.C.; Nguyen, T.M.; Yoh, J.;

Aerospace Conference, 1999. Proceedings. 1999 IEEE , Volume: 2 , 6-13 March 1999

Pages:137 - 143 vol.2

[\[Abstract\]](#) [\[PDF Full-Text \(500 KB\)\]](#) IEEE CNF

10 The future of wireless application development for a connected vehicle

Pu, K.;

Northcon/98 Conference Proceedings , 21-23 Oct. 1998

Pages:104 - 106

[\[Abstract\]](#) [\[PDF Full-Text \(228 KB\)\]](#) IEEE CNF

11 Design of a multiband OFDM system for realistic UWB channel environments

Batra, A.; Balakrishnan, J.; Aiello, G.R.; Foerster, J.R.; Dabak, A.;

Microwave Theory and Techniques, IEEE Transactions on , Volume: 52 , Issue: 9 , Sept. 2004

Pages:2123 - 2138

[\[Abstract\]](#) [\[PDF Full-Text \(840 KB\)\]](#) IEEE JNL

12 A cable-modem RF tuner

Stadius, K.; Malinen, A.; Jarvio, P.; Halonen, K.; Paatsila, P.;

European Solid-State Circuits, 2003. ESSCIRC '03. Conference on , 16-18 Sept. 2003

Pages:421 - 424

[\[Abstract\]](#) [\[PDF Full-Text \(646 KB\)\]](#) IEEE CNF

13 **Supporting human interaction with the Sentient vehicle**

Fawcett, J.K.;

Intelligent Transportation Systems, 2002. Proceedings. The IEEE 5th International Conference on , 2002

Pages:307 - 312

[\[Abstract\]](#) [\[PDF Full-Text \(639 KB\)\]](#) IEEE CNF

[Home](#) | [Log-out](#) | [Journals](#) | [Conference Proceedings](#) | [Standards](#) | [Search by Author](#) | [Basic Search](#) | [Advanced Search](#) | [Join IEEE](#) | [Web Account](#) | [New this week](#) | [OPAC](#)
[Linking Information](#) | [Your Feedback](#) | [Technical Support](#) | [Email Alerting](#) | [No Robots Please](#) | [Release Notes](#) | [IEEE Online Publications](#) | [Help](#) | [FAQ](#) | [Terms](#) | [Back to Top](#)

Copyright © 2004 IEEE — All rights reserved

AREA-EFFICIENT DIGITAL BASEBAND MODULE FOR BLUETOOTH WIRELESS COMMUNICATIONS

Myoung-Cheol Shin, Seong-Il Park, Sung-Won Lee, Se-Hyeon Kang, and In-Cheol Park

Division of Electrical Engineering, KAIST, Taejeon, Korea

ABSTRACT

This paper describes a small and portable digital baseband module developed for Bluetooth wireless technology. To achieve portability and the small size, much of the Bluetooth baseband layer protocols are implemented in software running on the embedded microcontroller while the minimal tasks of low-level baseband processing, UART and USB interfaces, and audio CODEC are performed on the dedicated hardware blocks. The fully synthesizable baseband module was fabricated in 0.25 μ m CMOS technology occupying 2.25 \times 2.25mm² area.

1. INTRODUCTION

Due to progress in related technologies in the past decades, the Bluetooth specification [1] was developed in 1999 to substitute cables connecting portable or desktop devices and to build low-cost wireless networks. It emphasizes low complexity, power consumption, and cost target [2]–[4]. It is crucial to implement digital baseband processing of Bluetooth in hardware and desirable to integrate the whole system on a chip to achieve the power and cost objective [4]. Baseband modules as IP (intellectual property) cores enable those higher levels of integration through SOC (system-on-chip) design and reduce time to market.

The tasks that the baseband module should perform vary significantly depending on the Bluetooth application. For the simplest applications such as wireless headsets or cellular phone add-on dongles, even the entire application as well as a basic part of baseband layer protocols may be implemented in software on the baseband processor. Complex ones, on the other hand, expect the baseband controller to support full baseband and host controller interface (HCI) functions, while the more complex upper layer protocols are processed on a host processor. The baseband module should therefore be very flexible and

This work was supported by the Korea Science and Engineering Foundation through the MICROS (Micro Information and Communication Remote Object-oriented System) research center at KAIST, Taejeon, Korea.

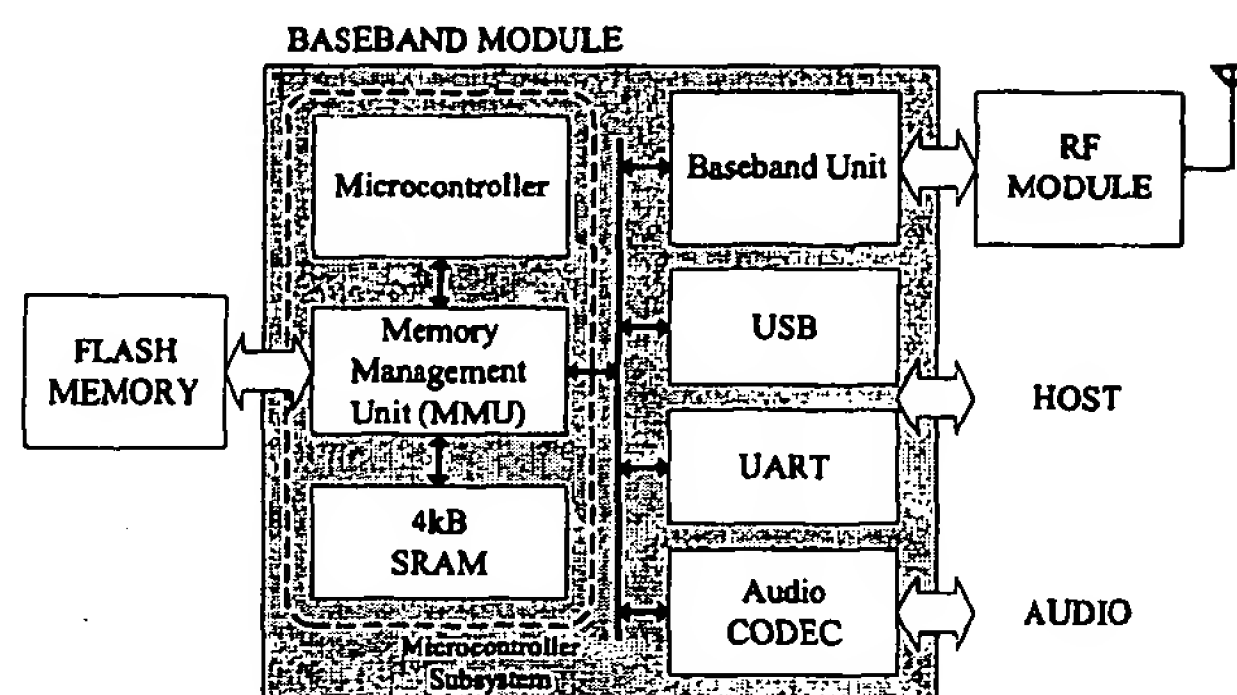


Figure 1. Hardware block diagram of the Bluetooth baseband module

programmable not to waste the hardware resources and processing power in any case.

Several baseband hardware cores have been developed either as a part of a system or as an IP [5]–[7]. Their size, however, are large because they perform almost all tasks in massive hardware while idling their microcontrollers [6], or because they use dual-port internal SRAMs [5].

This paper presents a simple, small, and portable Bluetooth baseband module that is suitable for use as an IP core. To reduce hardware area and gain more flexibility, the programmable embedded microcontroller performs as many tasks as possible and the hardware blocks implement only the most essential hardware functions. The module is made up of a logic part of only 85k gates and a 4kB single-port SRAM. Yet it performs all the essential Bluetooth baseband, link controller, link manager, and host controller interface (HCI) [1] functions including point-to-multipoint communications, multi-slot packets, encryption, scatternet, etc.

2. OVERALL ARCHITECTURE

As depicted in Figure 1, the baseband module consists of five major functional units: the microcontroller subsystem, baseband unit, UART, USB, and audio CODEC.

The microcontroller subsystem manages the other units and executes Bluetooth link manager, host controller interface, and some part of link controller protocol software. The baseband unit performs encoding and decoding of

Bluetooth bitstream and low-level timing control. It controls the RF module using a boundary scan serial interface. The USB and UART blocks implement Bluetooth host controller interface (HCI) physical transport layer. The audio CODEC processes voice data, and supports all the three Bluetooth audio coding: A-law, μ -law, and CVSD.

The primary clock input of the module is 48MHz. Whereas the USB runs at the 48MHz external clock in order to gain synchronization with 12MHz RX bitstream, the other units use a 12MHz clock that is generated by dividing the 48MHz clock by four to save power consumption. The other sub clocks that are used for interface between the baseband unit and an external RF module, such as 1MHz, 4MHz, and 3.2kHz, are provided by the RF module.

3. MICROCONTROLLER SUBSYSTEM

The microcontroller controls and manages the other units via memory-mapped I/O interface and interrupts. The other important task of the microcontroller is to run Bluetooth link manager, host controller interface, and a part of link controller protocol software. The microcontroller performs the complex part of the link control that require flexibility such as decision-making on received baseband packets and context switching between links, while the baseband unit performs bit-intensive, time-critical part. Although the link control tasks add some processing burden to the microcontroller, it still has excess processing power that may be used to run an entire protocol stack up to an application program for simple applications.

It is a clone of Advanced RISC Machines ARM7TDMI core [8] that we have developed as the microcontroller of our Bluetooth baseband module. We have designed the clone in order to take advantage of small die size and good code density of the ARM7TDMI, and to utilize its development environment. The 32-bit microcontroller core is more suitable for our goal of minimizing hardware through much flexibility than 8- or 16-bit low-performance cores. We used only public-domain documents and information of the core to develop the clone. The most part of the software is coded in Thumb instructions, which are 16-bit instructions requiring less bus width and memory size than 32-bit ARM instructions.

Because the microcontroller, especially its register file, occupies major portion of chip area, we have adopted a couple of schemes to reduce its size. Using a latch-based single clock register file structure that stores register data in slave latches and has one master flip-flop at input, we achieved a 27% area and 40% power reduction of the datapath with respect to the conventional flip-flop-based structure. Furthermore, we removed exception modes of ARM7TDMI unnecessary to our design, i.e. fast interrupt request (FIQ), abort, and undefined modes. Removal of those modes eliminates several banked registers and

greatly simplifies the register file decoder, which results in additional 7% area reduction of the datapath.

The memory management unit (MMU) in Figure 1 manages memory interface and memory-mapped I/O interface of the microprocessor. One of the most important tasks of the MMU is direct memory access (DMA) of peripheral units. If the baseband unit and HCI units have their own buffers implemented with flip-flops, the buffers will dominate the size of those units and impose a sizeable burden on the microcontroller to move the data. We moved the large buffers into the internal SRAM and implemented a DMA, which results in a great area reduction. Compared to the distributed buffer architecture, the logic gate count is reduced from 132,000 to 85,000 (35.7% reduction). The net area reduction is 6.1% taking the added 4kB on-chip SRAM into account. However, we can also use the RAM for storing microcontroller program data as well as for buffering. A 4kB or 8kB RAM is sufficient to run a whole simple application program on the microcontroller, whereas the memory-intensive L2CAP (logical link control and adaptation protocol) segmentation and reassembly of complex applications such as PC Internet access may be performed on a host.

We use a single-port on-chip SRAM, which is half as large as a dual-port SRAM of the same capacity. As the ARM7 architecture does not access the RAM while fetching instructions from the flash memory, the DMA can be easily implemented with a small single-port SRAM.

The MMU also provides flash memory programming capability. At power-up, a dedicated pin is used to select the loading of a new program from the UART interface.

4. BASEBAND UNIT

The baseband unit performs the bit-intensive baseband protocol functions that are power-efficient if implemented in hardware, i.e. Bluetooth bitstream processing and encryption. In addition, the most time-critical portion of the link controller tasks, such as low-level timing control and frequency hop calculation, are processed by the baseband unit. The complex part of the link controller requiring flexibility runs on the microcontroller in order to make the hardware small and less complex. The baseband unit conforms to the latest version of the Bluetooth specification [1] and supports all of the six ACL, four SCO, and four common packet types.

Figure 2 shows a block diagram of the baseband unit. TX and RX buffer blocks in Figure 2 transfer data received through DMA to the bitstream processing block using double buffering. At the same time they may generate interrupt signals that occur during data transmission and reception. CLK Offset Control logic controls three Bluetooth-specified clocks: CLK, CLKN, and CLKE. The Bluetooth clocks feed the hop selection logic that generates a hopping sequence for the 79-hop system.

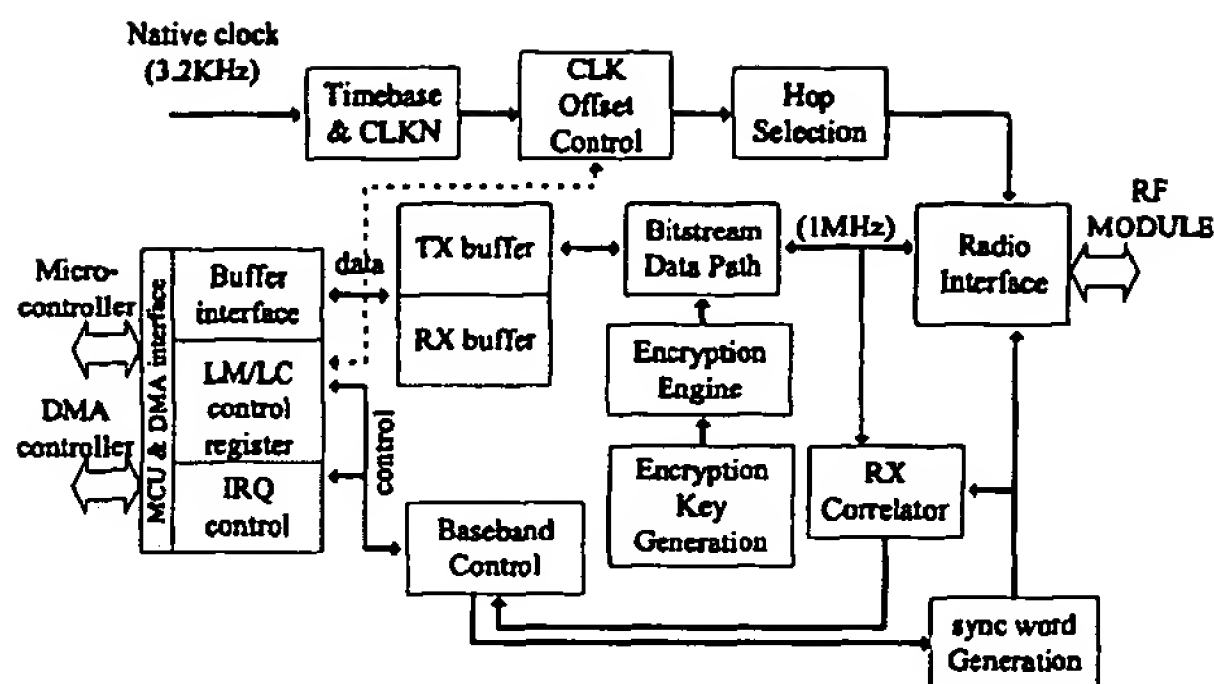


Figure 2. The block diagram of baseband unit

The baseband unit is directly connected to an RF module via Ericsson's RF module interface. The control of the RF module is achieved through a serial control interface based on the IEEE standard 1149.1 boundary scan architecture. The interface can be easily retargeted to other RF front-end modules.

5. HOST CONTROLLER INTERFACE UNITS

For data transmission between the Bluetooth baseband module and a host such as a PC, PDA, or cellular phone, two serial interfaces, USB and UART, are provided. The USB and UART units constitute the physical part of Bluetooth HCI. To reduce chip area, they implement only the most basic hardware parts while the microcontroller performs the complex flow control.

5.1. USB

The USB (Universal Serial Bus) unit complies with USB Specification 1.1 [9] and HCI USB transport layer specification of Bluetooth v1.1 [1], and supports full-speed 12Mbit/s host controller interface.

As shown in Figure 3, the USB unit consists of transceiver interface, serial interface engine, protocol layer handler, registers/endpoint manager, and parallel interface. The transceiver interface block drives the transceiver while sending data, and contains an RX clock recovery circuit. The serial interface engine encodes, decodes, and

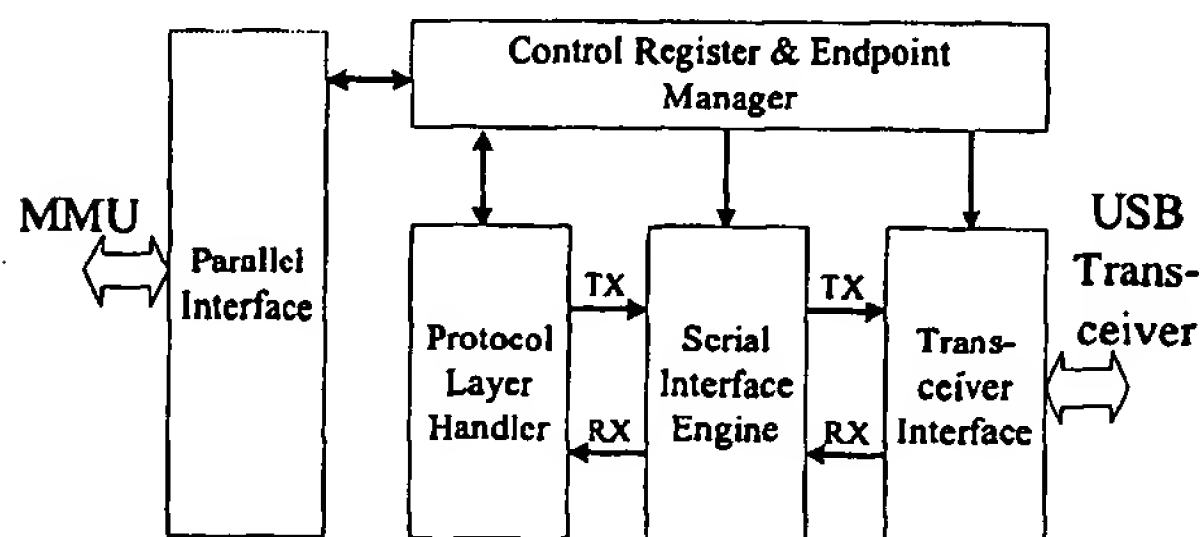


Figure 3. USB unit block diagram

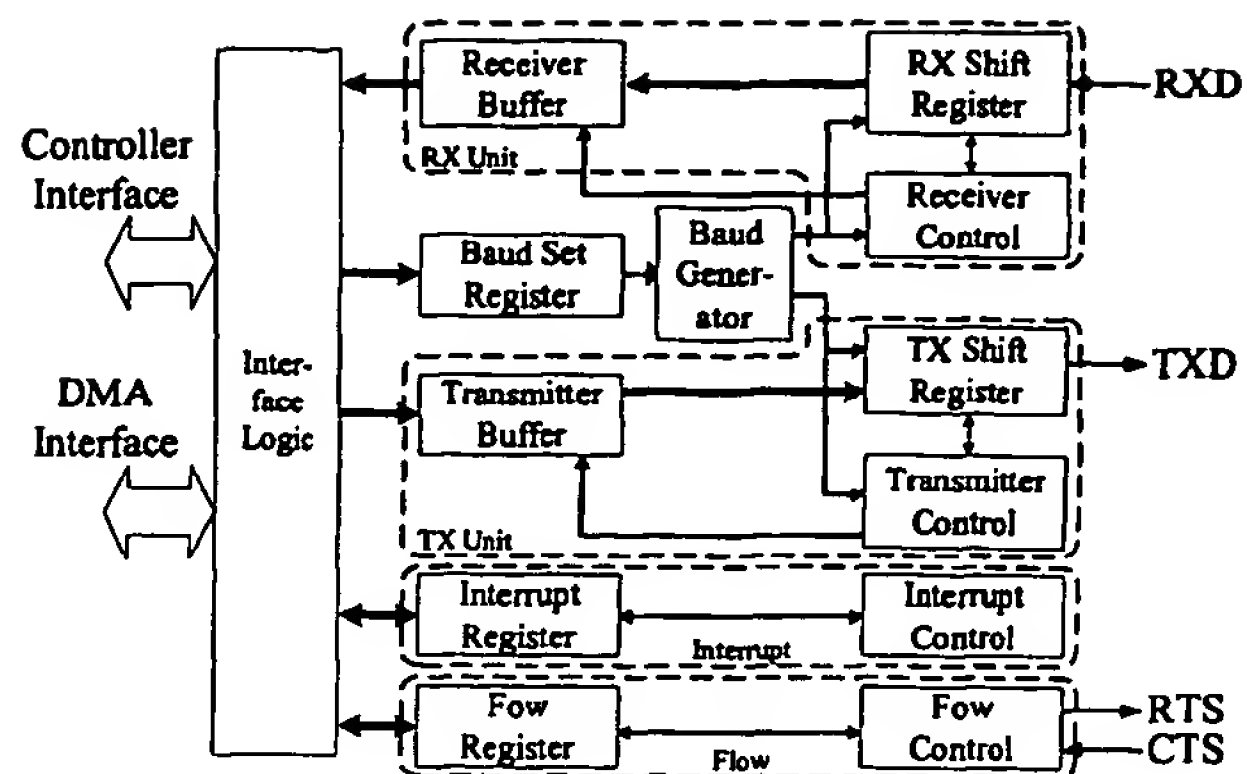


Figure 4. Architecture of the UART unit

samples signals at the recovered clock. Protocol layer handler works as a transaction sequencer, which performs the control to send or receive packets. The packets are stored in the corresponding endpoint buffer memory via DMA. The different types of HCI packets are mapped onto different USB endpoints according to the Bluetooth specification [1].

5.2. UART

The UART (Universal Asynchronous Receiver Transmitter) unit is designed based on industry-standard 16C450. It supports from 300bit/s to 1.5Mbit/s, and the default bit rate is 57.6kbit/s.

As shown in Figure 4, the UART unit consists of TX unit, RX unit, interrupt block, flow control, and interface block. The TX unit converts the parallel data into a serial form to transmit them. The data from the DMA interface are stored in buffer registers, converted into a serial form at the shift register, and transmitted. The RX unit processes the serial data received from RXD input. Unlike TX unit, this unit includes a data check block that detects the start bit of data and a packet decoder that finds the packet type and length of the received HCI packets to help HCI processing of the microcontroller.

6. AUDIO CODEC

Bluetooth specifies three audio coding techniques: Log PCM coding using either A-law or μ -law [10] and CVSD (continuous variable slope delta modulation) [1]. Since the table lookup of log PCM and low-pass filtering required in CVSD to avoid aliasing is appropriate for hardware implementation, we implemented all the three coding methods in a hardware audio CODEC. For simple audio applications, the audio unit interfaces directly to PCM audio devices without using HCI. The interface is designed to pass 8- to 16-bit decoded linear PCM signals. For PC applications, coded audio bitstream can also be transmitted

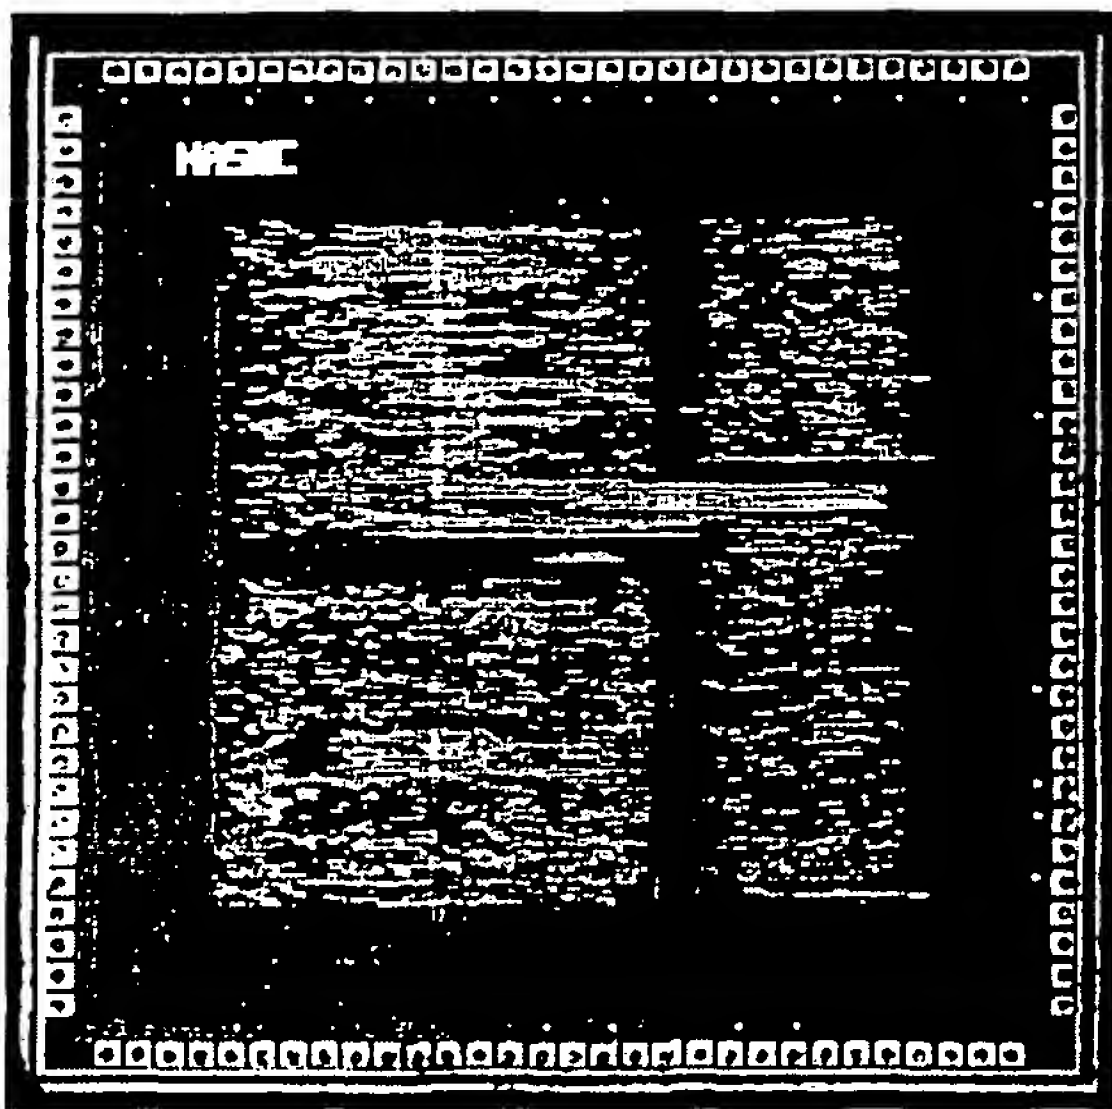


Figure 5. Die microphotograph of the prototype chip

via synchronous connection-oriented (SCO) HCI data packets through USB or UART.

In the Bluetooth specification, the sampling frequencies for log PCM and CVSD are not the same: 8kHz for log PCM and 64kHz for CVSD. We configured the PCM interface of the audio subsystem to operate at 8kHz and implemented interpolation and decimation with low-pass filtering for the CVSD block.

The audio CODEC is so small that it requires only 5,000 gates, where the 5-tap IIR low-pass filter occupies a half of the entire unit.

7. CHIP IMPLEMENTATION

We have implemented a prototype baseband module in 0.25 μ m CMOS technology. A die microphotograph is shown in Figure 5, and the characteristics of the chip is summarized in Table I. The prototype chip contains no on-chip SRAM.

All the blocks of the chip are described in Verilog HDL and fully synthesizable. The synthesized gate-level design is autorouted to implement the chip. The prototype chip is fully tested using IMS ATS2 test station to verify its functionality and timing.

In parallel with the fabrication of the chip, we constructed an FPGA test board in order to validate the hardware and software in real-time environment. Including our design mapped onto a Xilinx Virtex XCV1000 FPGA chip, the test PCB board contains a flash memory, external RAM, Ericsson PBA313 01 RF front-end module, and antenna.

We confirmed the point-to-point connection capability of the baseband module with two test boards, each of which is connected to a PC through UART. Two boards

Table I. Major chip characteristics

Technology	0.25 μ m CMOS 5LM
Core size	2.25 \times 2.25mm ²
Gate count	85,000
Supply voltage	2.5V
Operating clock	48MHz

successfully established a connection and transferred bit-streams and files.

8. CONCLUSIONS

A small, flexible baseband module for Bluetooth wireless connection technology has been presented.

We implemented a prototype chip in 0.25 μ m CMOS technology. The chip occupies only 2.25 \times 2.25mm² core area, and its functionality and timing characteristics are tested using a test station.

As the module is implemented in the way that the most of the tasks are implemented in software except the indispensable hardware-efficient functions, it can be adjusted to various Bluetooth applications without wasting hardware resources and processing power. Since the module is a small, fully synthesizable soft core, it can be easily integrated as an IP core on SOC ASICs for the applications related to Bluetooth communications, which embodies the baseband module, RF front-end, and even host application circuits.

REFERENCES

- [1] *Specification of the Bluetooth System, Specification Volume I, Core*, Ver. 1.1, Feb. 2001.
- [2] J.C. Haartsen, and S. Mattisson, "Bluetooth—A New Low-Power Radio Interface Providing Short-Range Connectivity," *Proceedings of the IEEE*, vol. 88, pp. 1651–1661, Oct. 2000.
- [3] R. Shorey and B.A. Miller, "The Bluetooth Technology: Merits and Limitations," *IEEE International Conference on Personal Wireless Communications*, pp. 80–84, 2000.
- [4] J. Bray and C.F. Sturman, *Bluetooth: Connect Without Cables*, Prentice Hall PTR, Upper Saddle River, NJ, 2001.
- [5] F. O. Eynde, et al., "A Fully-Integrated Single-Chip SOC for Bluetooth," *IEEE International Solid-State Circuits Conference*, pp. 196–197, and 446, 2001.
- [6] Ericsson Microelectronics, *EBCP CherryRed Bluetooth Baseband IP*, May 2001.
- [7] Cambridge Silicon Radio, *BlueCore01b Product Data Sheet*, July 2001.
- [8] Advanced RISC Machines, *ARM7TDMI Data Sheet*, Aug. 1995.
- [9] *Universal Serial Bus Specification 1.1*, Sep. 1998.
- [10] International Telecommunications Union, *ITU-T Recommendations G.711 Pulse Code Modulation (PCM) of Voice Frequencies*, Nov. 1988.